





**PERFORMANCES**

MODELS	m <sup>3</sup> /h	l/s	Pa	W	dB (A)*
E-STYLE 90	80	22	23	10	30,1
E-STYLE 100	95	26	42	14	31,4
E-STYLE 120	165	46	55	15	36,7
E-STYLE 150	315	87	71	25	43,9

\*Lp(A) measured at 3m in open field 230V-50Hz.

**CURVES**

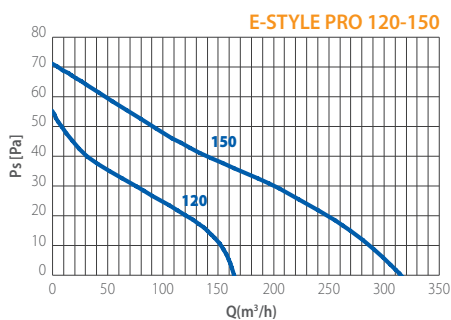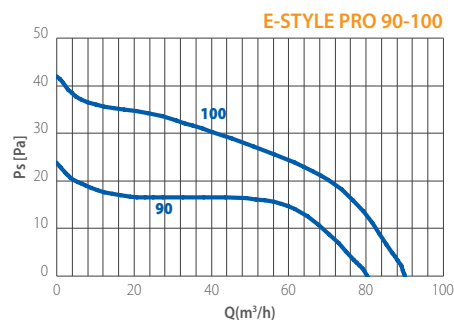

17 mm


ULTRA SLIM




Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Provided with back draught shutters on models 100, 120, 150
- Neon running light
- Style, technology

**INSTALLATION**

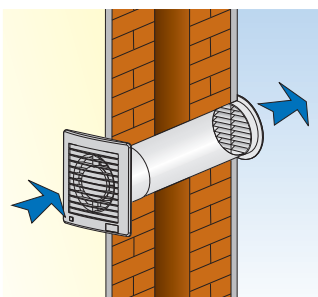

WALL

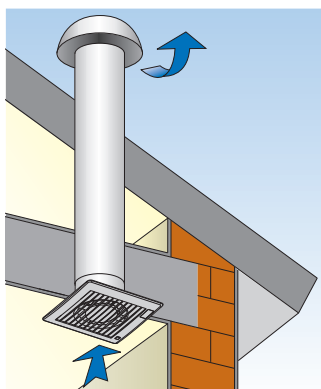


CEILING

**VERSIONS**

- STANDARD**  
On/off through light or remote control switch.
- TIMER**  
Integral electronic timer adjustable from 3 to 25 minutes.
- MHT**  
Humidity control, adjustable from 40 to 80% of R.H.
- SELV**  
SELV 12 V a.c.

**DIMENSIONS (mm)**

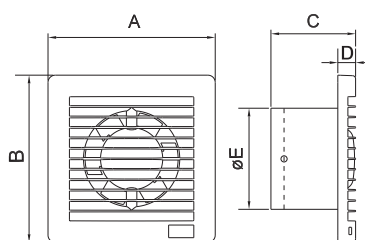

MODELS	A	B	C	D	Eø	Kg
E-STYLE 90	160	160	81	17	92	0,4
E-STYLE 100	160	160	95	17	98	0,4
E-STYLE 120	180	180	101	18	119	0,6
E-STYLE 150	200	200	119	22	149	1,0

**ACCESSORY**



chrome



inox satin