



### PERFORMANCES

MODEL	DUCT Ø	m³/h	l/s	Pa	W	dB(A)*
<b>Standard - Pull cord - Timer - MHY smart - SELV</b>						
ELIX 100	100	97	27	151	29	42
<b>Comfortimer - 2 speed</b>						
ELIX 100	100	97 / 54	27 / 15	151 / 116	29 / 14	42 / 23


\* Lp(A) measured at 3m in open field 230V-50Hz.



Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)

- Centrifugal duct fan Ø 100 mm with central outlet.
- Innovative design with flat front cover and lateral intake.
- Available with EC motor for a perfect combination of style and performance.
- Provided with sliding filter in PP removable and washable in dishwasher and with back-draught shutters.

### INSTALLATION

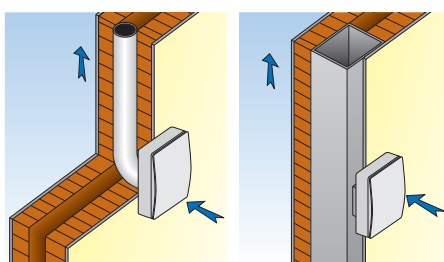


Multiple Duct


Single Duct



Antivibration gasket



Central outlet




Lateral intake on the whole perimeter




Sliding filter

### CURVES

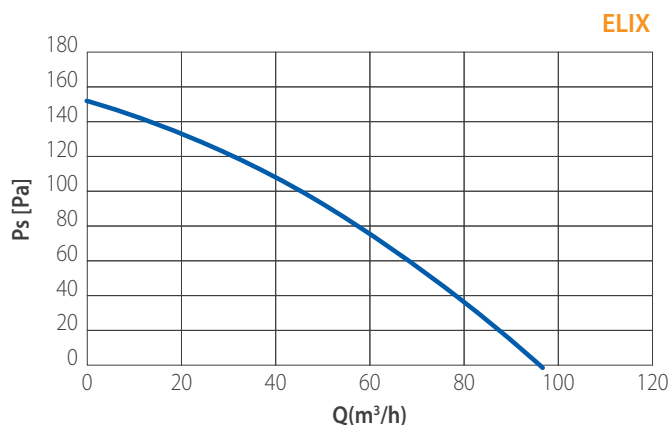

### DIMENSIONS (mm)

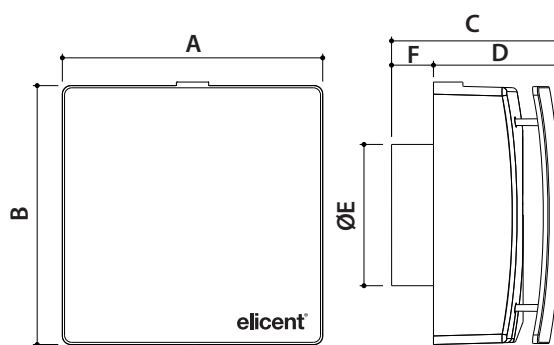

MODEL	A	B	C	D	E	F	Kg
ELIX 100	180	180	116	87	99	29	2,6