



HD100

Hand Dryer CLASSIC



HD100P
Manual

HD100A
Automatic

- Classic design
- Compact
- Manual or Automatic versions
- Medium traffic facilities



PERFORMANCE


TECHNICAL SPECIFICATION

Airflow (m³/h)	240
RPM	2800
Air velocity (Km/h)	65
Air temperature	52°C
Motor Power (W)	140
Heating element power (W)	1500
Consumption (A)	7
Noise level (dBA)	58
Voltage (V)	220-240
Frequency (Hz)	50/60
Electrical insulation	Class II
Drying time	35 sec
Weight Kg	3 Kg
Protection	IP21

FEATURES

- Compact, one-piece cover made of UV resistant ABS white plastic, 3 mm thick.
- Cover fixed to the base by 4 screws.
- Air outlet grille in Zamak.
- Manual start-up through pushbutton which activates an electronic timer with a 40 seconds cycle.
- Warm airflow (52°C) at high velocity (65 Km/h) for a quick drying.
- Housing and impeller in fire-resistant ABS plastic UL 94-V0.
- Waved wired NiCr heating element with self-resetable thermal cut-off.
- Class F motor, incorporating a safety thermostat and a self-resetable thermal cut-off at 70°C.

DIMENSIONS (mm)

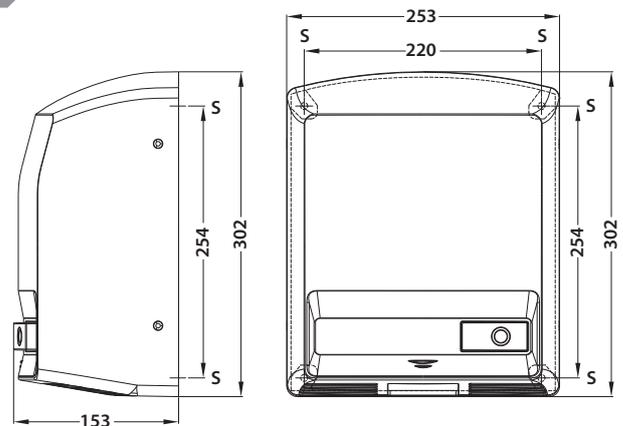

S = screw holes



HR100

Wall-mounted hair dryer



- Elegant and compact design
- Safe and efficient



PERFORMANCE

TECHNICAL SPECIFICATION

Airflow (m ³ /h)	40
RPM	15,000
Air velocity (Km/h)	79
Air temperature	60°C
Motor Power (W)	150
Heating element power (W)	700
Consumption (A)	3
Noise level (dBA)	60
Voltage (V)	220-240
Frequency (Hz)	50/60
Length tube (mm)	800 - 2000 mm
Weight Kg	1,8 Kg
Electrical insulation	Class II
Protection	IP23

FEATURES

- Quick and easy installation.
- Automatically activates when hand piece is removed from base.
- Fitted with a special security system which switches off the dryer after 15 min of use.
- High velocity airflow (79 Km/h) for a quick drying.
- White ABS plastic one-piece cover, 3 mm thick, impact-resistant and UV protected.
- The polyurethane extensible tube follows your movements while drying.
- PP UL 94-V0 helicoidal fan wheel.
- White ABS handset with a thermal protector inside.
- White ABS support and fixing.
- Motor, class B, with thermal protection.
- Waved NiCr wire heating element that incorporates a self-resetable thermal cut-off.

DIMENSIONS (mm)

