



PERFORMANCES

MODEL	m ³ /h	l/s	Pa	W	dB (A)*
MINISTYLE	90	25	26	14	39
MINISTYLE TIMER	90	25	26	14	39


*Lp(A) measured at 3m in open field 230V-50Hz.




Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)

- Ideal for small premises
- Easy to install and extremely compact (front cover 17 mm, height and width 14 mm)
- Made in high quality antistatic technopolymer
- Available with back draught shutters on request

INSTALLAZIONI




WALL

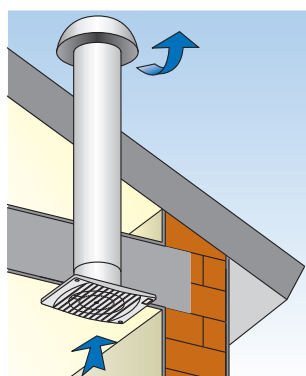

CEILING *

* Only Ministyle without back-draught shutters


CURVE

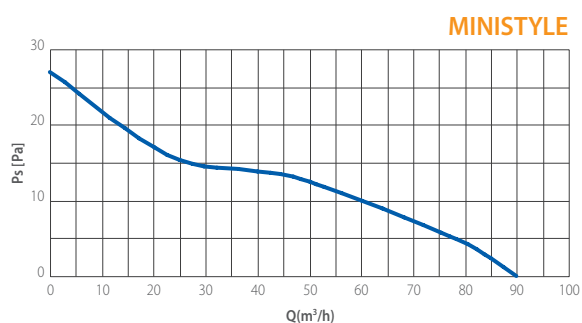

VERSIONS

- STANDARD**
On/off through light or remote control switch.
- PULL CORD**
On/off through pull cord switch.
- TIMER**
Integral electronic timer adjustable from 3 to 25 minutes.

DIMENSIONS (mm)



MODEL	A	B	C	D	E	Kg.
MINISTYLE	140	140	65	17	98	0,5