



MRF

Centrifugal roof fans




PERFORMANCES


MODELS	m ³ /h	l/s	Pa	W	A	dB(A)*
MRF 100	318	88	415	74	0,22	52
MRF 125	342	95	395	75	0,22	52
MRF 150	579	161	459	80	0,37	52
MRF 160	736	204	515	116	0,47	54
MRF 200	794	280	503	200	0,48	55
MRF 250	866	240	602	203	0,65	51
MRF 315	1222	339	838	247	1,10	55

*LpA measured at 3m in open field 230V-50Hz.



Comply with ErP Directive 2009/125/CE and UE Regulation 1253/2014. Residential Ventilation Unit. To comply with the ErP2018 parameters, a local demand controller must be used.

- High performance centrifugal fans for roof installation.
- Compact sizes, available with or without square roof curb.
- Easy and cost-effective solution for a centralized ventilation requirement.
- 7 models Ø100 to 315 mm
- Made in aluminium and steel sheet with epoxy finish, highly resistant to atmospheric agents.
- Ball bearing motor.
- EC Version available 

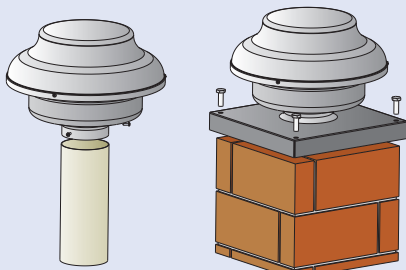


MRF

MRF/BA


MODELS

- MRF
- MRF with square roof curb

INSTALLATION

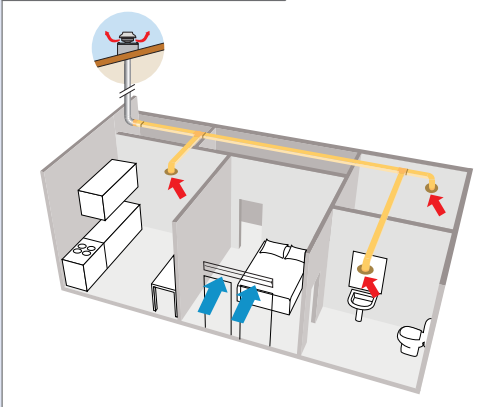

CURVES

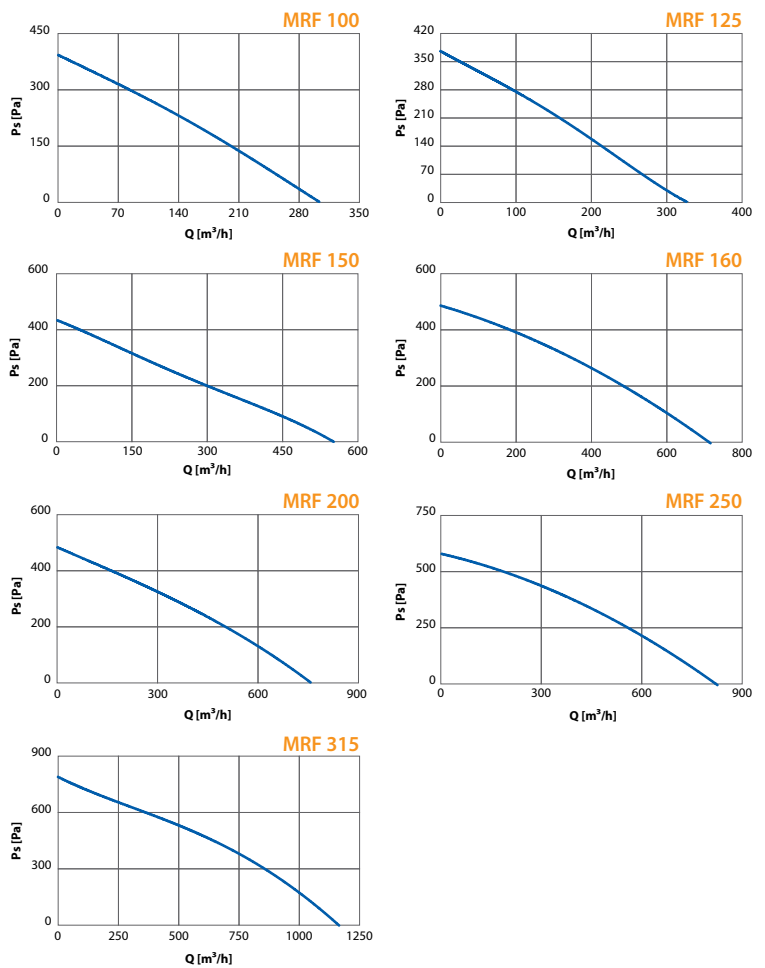

DIMENSIONS (mm)

MODELS	D1	D2	H	∅A	∅B	C	Kg	Kg*
MRF100	98	333	225	300	265	36	3,1	4,6
MRF125	122	333	225	300	265	36	3,1	4,6
MRF150	147	405	266	400	360	36	4,2	6,2
MRF160	157	405	266	400	360	36	5	6,2
MRF200	198	405	266	400	360	36	5,5	6,8
MRF250	248	405	266	400	360	36	6	7,3
MRF315	314	484	322	400	360	36	7	10

* Models with square roof curb

