



# POLAR EVOLUTION




## VENTILATION Reversible ceiling fan




MODEL	DIAMETER (mm)	V at 50Hz	W	A	RPM	m³/h
POLAR EVOLUTION 90	900	230	65	0,25	390	5150
POLAR EVOLUTION 120	1200	230	80	0,33	330	10.080
POLAR EVOLUTION 140	1400	230	85	0,35	285	11.220
POLAR EVOLUTION 150	1500	230	90	0,38	280	13.140

### DIMENSIONS

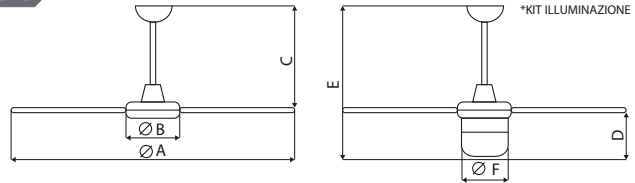


MODEL	Ø A	Ø B	C	D	E	Ø F	Kg
POLAR EVOLUTION 90/36	900	200	530	150	680	190	5
POLAR EVOLUTION 120/48	1200	200	530	150	680	190	5,4
POLAR EVOLUTION 140/56	1400	200	530	150	680	190	5,6
POLAR EVOLUTION 150/60	1500	200	530	150	680	190	5,9

### REVERSIBILITY



**WINTER**  
direct ventilation



**SUMMER**  
indirect ventilation

### ACCESSORIES



Light kit



Remote controller and receiver kit



RVS/L 5 speed controller  
with on/off and light switch.  
Max load 0,5 A. IP42 protection.  
Size 118x118x58 mm.



30 and 90 cm rods



RVS PLUS EVO: 5 speed  
controller with on/off switch.  
Regulation up to 4 POLAR.  
Max load 1,5 A. IP 42 protection.  
Size 158x118x76 mm.



# MP800




- Single (230V) or three-phase (400V) motors
- Supplied with ceiling fixing chains
- Ideal for large heated premises
- Each scatter covers an area of 200 m²

## VENTILATION Air Scatter



MODEL	m³/h	KW	RPM	PROTECTION IP	dB (A) (at 6 m)	Kg
MP800 single-phase	9000	0,14	450	55	54	26
MP800 three-phase	10500	0,12	530	55	59	25

### DIMENSIONS

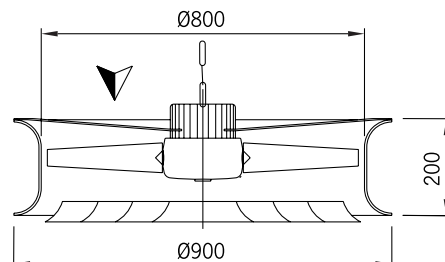

MODELLO	Ø A	B	Ø C
MP800	900	200	800