



Series

VITROWindow axial fans
Window installation**PERFORMANCES**

MODELS	m³/h	l/s	Pa	W	dB (A)**	MARKED
VITRO 6/150 LC-A	200	61	36	28	40	
VITRO 6/150 P-A	300	83	74	40	48	
VITRO 9/230 LC-AR	*600 / 374	167 / 104	42 / 35	29	50	-
VITRO 9/230 P-AR	*700 / 400	194 / 111	55	46	50	
VITRO 12/300 AR	*1,400 / 800	389 / 222	83	84	59	

* Extract / Intake

** Lp(A) measured at 3m in open field 230V-50Hz.



**Comply with ErP Directive 2009/125/CE
and EU Regulation 327/2011**
Classification: FAN

- High extract performance for polluted premises, ideal for commercial environments.
- Suitable for wall, double window and double glazed window installation (accessories upon request).
- 9" and 12" are suitable for reverse running.
- IPX4 on external part only.

VERSIONS**A****AUTOMATIC**

Automatic electrical opening of the shutter. On/Off via light/remote switch

AR**AUTOMATIC REVERSIBLE**

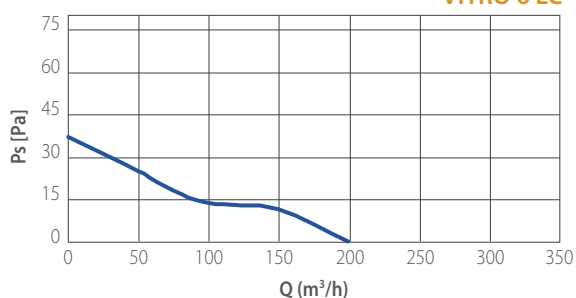
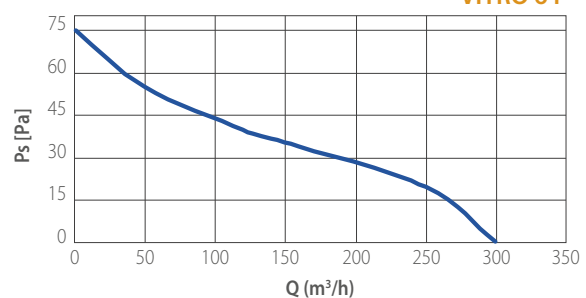
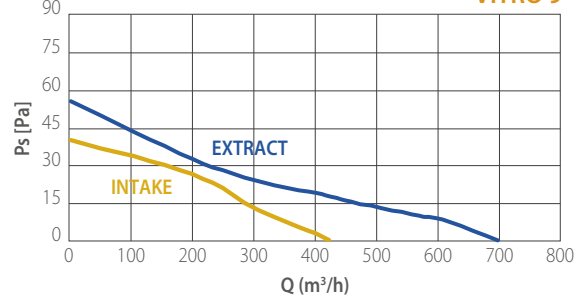
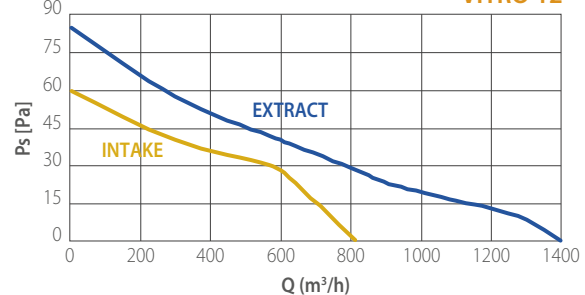
Automatic electrical opening of the shutter. On/Off via light/remote switch. + Reversible air flow through reversible speed controller RVS/R

P**POTENTIATED**

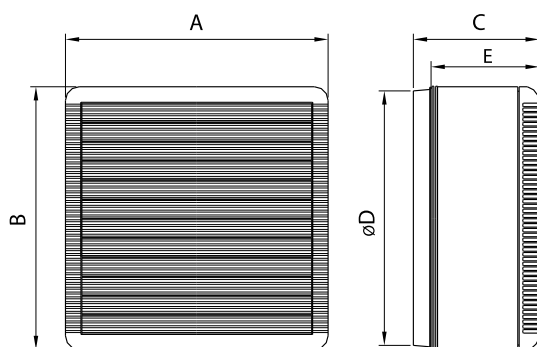
Potentiated motor for higher airflow performance

LC**LOW CAPACITY**

(LCM - Low capacity Manual / LC-AR Low capacity Automatic Reversible)

CURVES**VITRO 6 LC****VITRO 6 P****VITRO 9****VITRO 12**

DIMENSIONS (mm)



MODELS	A	B	C	Ø D	E	Kg*
VITRO 6/150	195	195	126	184÷188	102	1,7
VITRO 9/230	287	287	138	254÷258	122	3,5
VITRO 12/300	364	364	162	324÷329	137	5

* Pesi indicativi



Thermoactuator
for the electrical opening
of the grille.

INSTALLATION

