
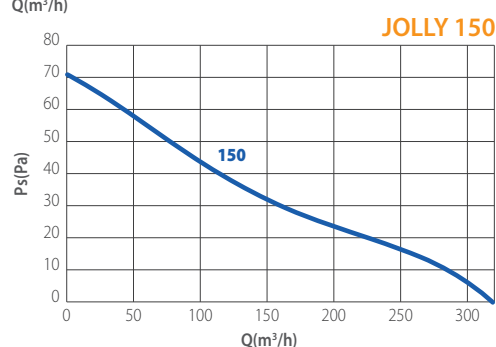
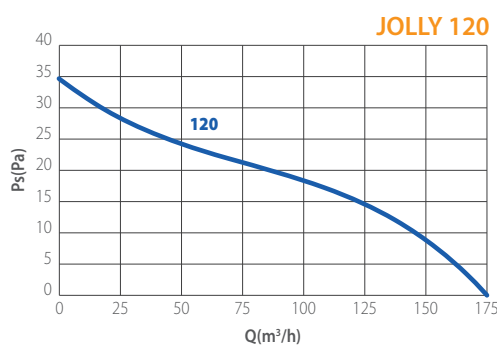


PERFORMANCES

MODELS	m ³ /h	l/s	Pa	W	dB(A)
JOLLY 100	90	25	18	14	39
JOLLY 120	175	49	35	18	43
JOLLY 150	320	89	71	40	51

*Lp(A) measured at 3m in open field 230V-50Hz.

CURVES

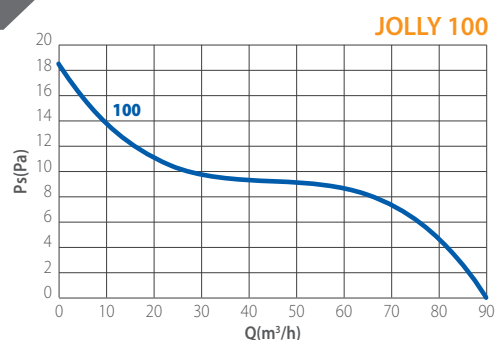

- Wall axial fans suitable for direct exhaust (max duct length 1,5 m).
- Complete range ø 100, 120, 150 mm.
- Compact sizes.
- Manufactured in shock-proof high quality technopolymer.
- Maintenance free, self-lubricating sleeve bearing motor for long life.
- Induction motor with overheating protection 230V - 50/60 Hz.
- Easy installation, maintenance and cleaning.
- Available with back draught shutters upon request.

VERSIONS



Standard version

On/Off via light/remote control switch.




Pull cord switch

On/Off via pull cord switch.




Timer

Integral electronic timer adjustable from 3 to 25 minutes.

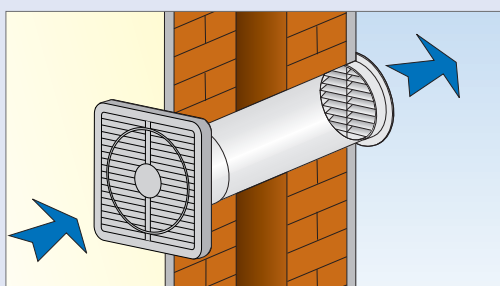

DIMENSIONS (mm)

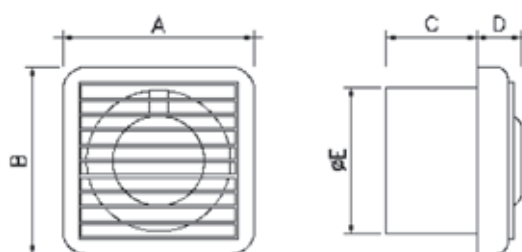

MODEL	A	B	C	D	E
JOLLY 100	125	125	63	29	97
JOLLY 120	150	150	73	29	118
JOLLY 150	185	185	93	29	151