


PERFORMANCES

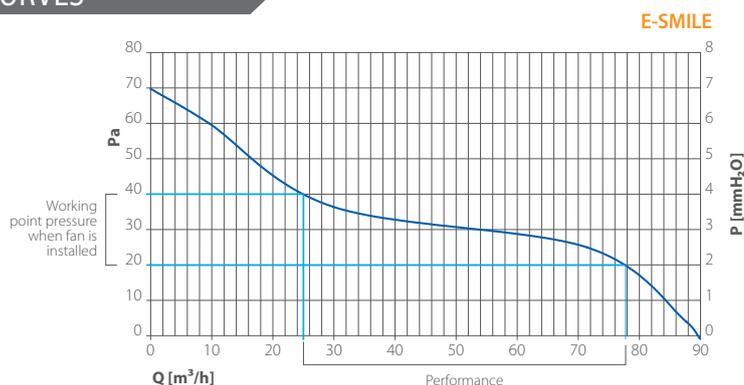
MODELS	m ³ /h	l/s	Pa	W	dB(A)*
E-SMILE	90	25	71	7,5	29,4
E-SMILE COMFORTIMER	90 / 60	25 / 17	71 / 44	7,5 / 5	29,4 / 19
E-SMILE COMFORT HYGRO	90 / 60	25 / 17	71 / 44	7,5 / 5	29,4 / 19
E-SMILE PIR	90	25	71	7,5	29,4
E-SMILE SELV	90	25	71	7,5	29,4

*Lp(A) measured at 3m in open field 230V-50Hz.

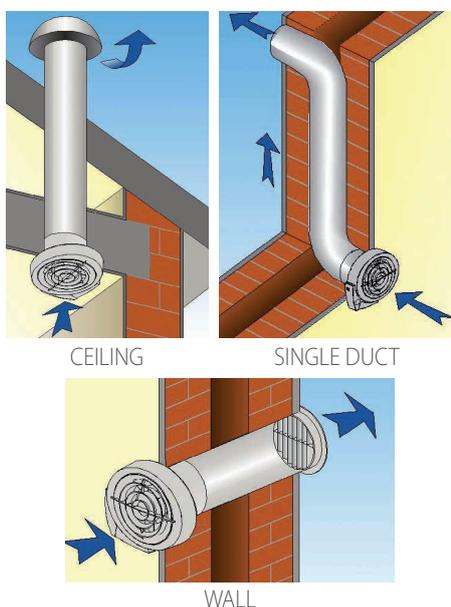
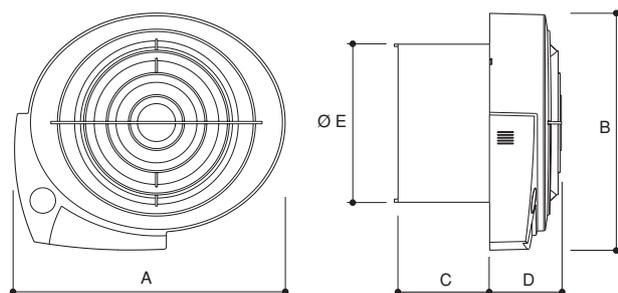


Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Unique model ø100 mm
- High aerulic performance
- Low consumption: from 5 to 7,5 W
- Suitable for medium length ducting
- Provided with ball bearing motor Long Life 30.000 hours and robust back-draught shutters

CURVES

VERSIONS

- STANDARD** - On/off through light or remote control switch
- PULL CORD** - On/off through pull cord switch
- TIMER** - Integral electronic timer adjustable from 3 to 25 minutes
- COMFORTIMER** - Overrun timer at low speed
- MHT** - Humidity control, adjustable from 40 to 80% of R.H.
- MHY** - Smart Humidity control automatic progressive increase/decrease of fan speed according to the percentage of R.H.
- PIR** - On/off via Passive infrared sensor
- 2 SPEED** - 24 hours running at the lowest speed
- SELV 12 V** - SELV 12 V a.c.

INSTALLATION

DIMENSIONS (mm)


MODEL	A	B	C	D	Ø E	Kg
E-SMILE	168	150	57	45	99,8	0,67