



AXC TP

Centrifugal in line duct fans
TP Version



Comply with ErP Directive 2009/125/CE
and EU Regulation 1253/2014
Classification: Residential Ventilation Unit

- Lightweight and silent
- Made in self-extinguishing V2 technopolymer
- Backward curved blades and ball bearing motor provided with thermal cut-out
- 4 models with \varnothing from 100 to 160 mm




PERFORMANCE

MODELS	DUCT \varnothing mm	m ³ /h	l/s	Pa	A	W	dB (A)*
AXC 100 TP	100	211	58	263	0,13	27	32
AXC 125 TP	125	265	73	251	0,13	27	33
AXC 150 TP (1)	150	430	119	325	0,29	65	39
AXC 160 TP (1)	160	450	125	325	0,29	65	40





* LpA measured at 3m in open field 230V-50Hz.
(1) To comply with the ErP2018 parameters, a local demand controller must be used. See E-VSD pag. XX.

DIMENSIONS (mm)

MODELS	A	B	\varnothing C	\varnothing D	Kg.
AXC 100 TP	238	25	98	212	1,5
AXC 125 TP	238	25	123	212	1,5
AXC 150 TP	232	28	147	253	2
AXC 160 TP	232	28	157	253	2



CURVES

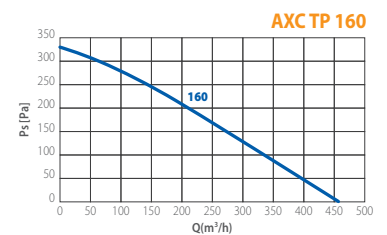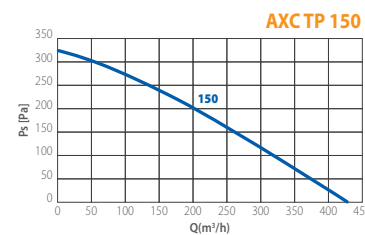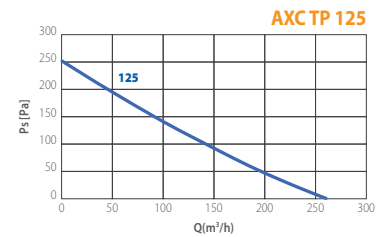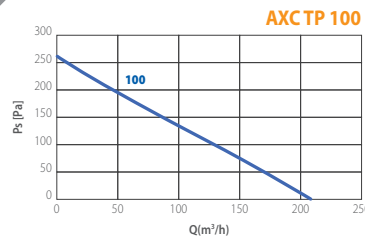

INSTALLATION

