




E-SMILE

Powerflow Low Watt wall axial fans
Wall and ceiling installation



Comply with ErP Directive 2009/125/CE
and EU Regulation 1253/2014
Classification: Residential Ventilation Unit

- To exhaust air directly to the outside or into medium length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Unique model ø100 mm
- High aeraulic performance
- Low consumption: from 5 to 7,5 W
- Provided with ball bearing motor Long Life 30.000 hours and robust back-draught shutters




PERFORMANCE

MODELS	m ³ /h	l/s	Pa	W	dB(A)*
E-SMILE	90	25	71	7,5	29,4
E-SMILE COMFORTIMER	90 / 60	25 / 17	71 / 44	7,5 / 5	29,4 / 19
E-SMILE COMFORT HYGRO	90 / 60	25 / 17	71 / 44	7,5 / 5	29,4 / 19
E-SMILE PIR	90	25	71	7,5	29,4
E-SMILE SELV	90	25	71	7,5	29,4


* Lp(A) measured at 3m in open field 230V-50Hz.

CURVES

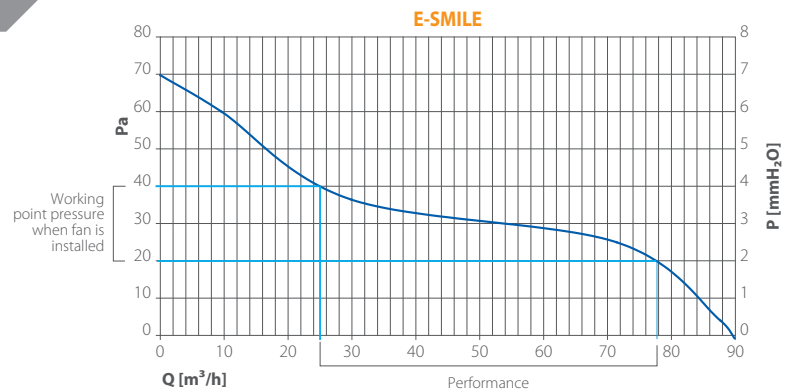


INSTALLATION


CEILING



SINGLE DUCT



WALL

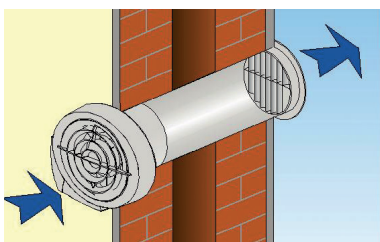

VERSIONS



BASE - On/off through light or remote control switch



TIMER - Integral electronic timer adjustable from 3 to 25 minutes



CMT - COMFORTIMER - Overrun timer at low speed



MHT - Humidity control, adjustable from 40 to 80% of R.H. and Timer adjustable from 3 to 25 mm



MHY - Smart Humidity control automatic progressive increase/decrease of fan speed according to the percentage of Relative Humidity



PIR - On/off via Passive infrared sensor



2V - 24 hours running at the lowest speed



SELV 12V - SELV 12V a.c.

DIMENSIONS (mm)

MODEL	A	B	C	D	EØ	Kg
E-SMILE	168	150	57	45	99,8	0,67

