



Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014
Classification: Residential Ventilation Unit

- Special version of ECO LINE with automatic shutters and provided with assembled kit for window installation.
- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.




PERFORMANCE


MODELS	PROTECTION	m ³ /h	l/s	W	Pa	dB(A)*
ECOWIND 100 A	IPX4	90	25	13	20	42
ECOWIND 120 A	IPX4	130	36	15	31	44
ECOWIND 150 A	IPX4	260	72	25	60	51

**Lp(A) measured at 3m in open field 230V-50Hz.

CURVES

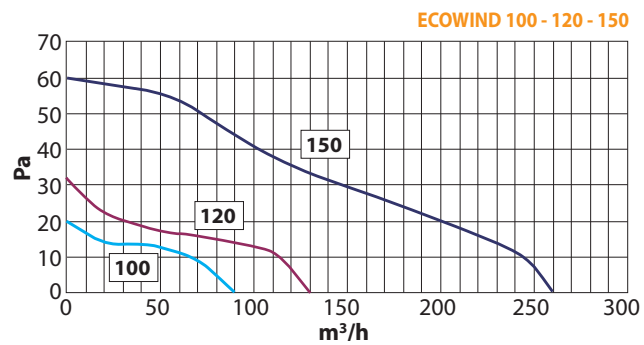


DIMENSIONS (mm)

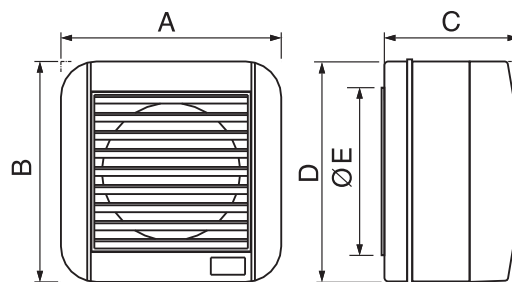

MODELS	A	B	C	D	ØE	Kg
ECOWIND 100 A	155	155	110	157	150	0,8
ECOWIND 120 A	180	180	132	178	175	1,0
ECOWIND 150 A	209	209	147	208	175	1,4

INSTALLATION



Max glass thickness 22 mm

WINDOW
(with window kit)