



Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014
Classification: Residential Ventilation Unit

- Centrifugal duct fans with central outlet
- 2 models: 100 and 250, Ø100 and 120 mm



PERFORMANCE

MODELS	DUCT Ø	m³/h	l/s	Pa	W	dB (A)*
Standard - Timer - MHT - Pull Cord						
FLUX 100	100	90	25	124	30	44
2V - HT 2V						
FLUX 100 2V	100	90 / 38	25/10	124 / 78	30 / 12	44/37
Selv - Selv Timer						
FLUX 100 SELV	100	90	25	124	26	44
Standard - Timer - MHT						
FLUX 250 / Ø 100	100	201	56	195	29	52
FLUX 250 / Ø 120	120	232	64	195	29	52

* Lp(A) measured at 3m in open field 230V-50Hz.

VERSIONS

- BASE** - On/off through light or remote control switch
- PULL CORD** - On/off through pull cord switch
- TIMER** - Integral electronic timer adjustable from 3 to 25 minutes
- MHT** - Humidity control, adjustable from 40 to 80% of R.H. and Timer adjustable from 3 to 25 min
- 2 V** - 24 hours running at the lowest speed
- 2 V MHT** - 2 speed MHT with humidity control
- SELV** **SELV 12 V** a.c.



Antivibration gasket





Backdraught shutter




Central outlet

CURVES

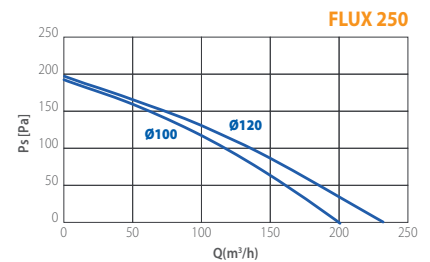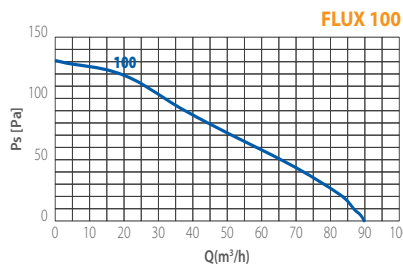


INSTALLATION

SINGLE DUCT



MULTIPLE DUCT



DIMENSIONS (mm)

MODELS	A	B	C	D	ØE	F	Kg.
FLUX 100	160	160	119	89	97	30	0,8
FLUX 250/100	210	210	156	131	97	25	1,8
FLUX 250/120	210	210	156	131	119	25	1,8

