



Complies with ErP Directive 2009/125/CE and EU Regulation 1253/2014
Classification: Residential Ventilation Unit

- Centrifugal duct fan Ø100 mm with central outlet.
- Innovative design with flat front cover and lateral intake.
- Available with EC motor for a perfect combination of style and performance.
- Provided with sliding filter in PP removable and washable in dishwasher and with back-draught shutters.



PERFORMANCE


MODEL	DUCT Ø	m³/h	l/s	Pa	W	dB(A)*
Base - Pull cord - Timer - MHY smart - SELV						
ELIX 100	100	97	27	151	29	42
CMT Comfortimer - 2 V						
ELIX 100	100	97 / 54	27 / 15	151 / 116	29 / 14	42 / 23

* Lp(A) measured at 3m in open field 230V-50Hz.

VERSIONS

- BASE** - On/off through light or remote control switch
- PULL CORD** - On/off through pull cord switch
- TIMER** - Integral electronic timer adjustable from 3 to 25 minutes
- CMT - COMFORTIMER** - Overrun timer at low speed
- MHY** - Smart Humidity control automatic progressive increase/decrease of fan speed according to the percentage of Relative Humidity
- 2 V** - 24 hours running at the lowest speed
- 2 V MHT** - 2 speed MHT with humidity control
- EC VERSIONS** - See pag. 72


INSTALLATION

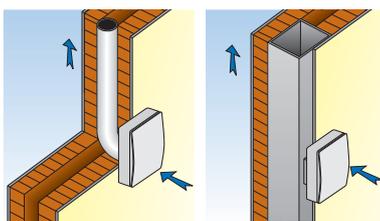


MULTIPLE DUCT

SINGLE DUCT

CURVES

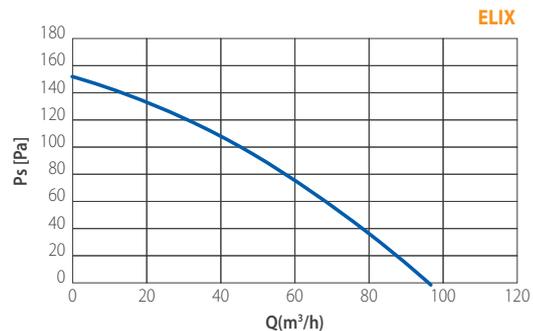

DIMENSIONS (mm)

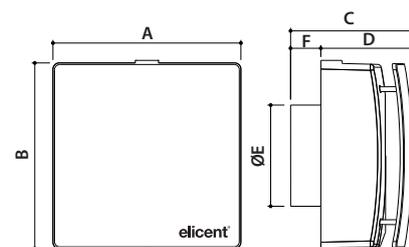


MODEL	A	B	C	D	ØE	F	Kg
ELIX 100	180	180	116	87	99	29	2,6



Antivibration gasket



Central outlet



Lateral intake on the whole perimeter



Sliding filter