



MINIVITRO

Window axial fans
Window installation



Comply with ErP Directive 2009/125/CE
and EU Regulation 327/2011

Classification: FAN

- Special version of VITRO suitable for wall or window installation, to exhaust air directly to the outside or into a short length ducting.
- Compact dimensions.
- Model A with automatic shutter and external fixed grille.



IPX4


PERFORMANCE

MODELS	Protection	m³/h	l/s	dB(A)*	Pa	W
MINIVITRO 4/100 A MFE	IPX4**	90	25	39	19	11
MINIVITRO 4/100 MGE	IPX2-IPX4**	90	25	40	33	11
MINIVITRO 5/120 MGE	IPX2-IPX4**	160	44	43	51	15
MINIVITRO 6/150 MGE	IPX2**	200	56	43	51	25

* Lp(A) measured at 3 m in open field 230V/50Hz

A = automatic - MGE = with external gravity shutter - MFE = with external fixed grille.

DIMENSIONS (mm)

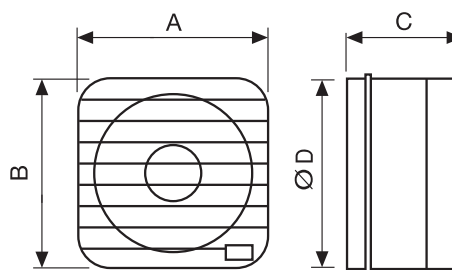

MODEL	A	B	C	ØD
MINIVITRO 4/100 A MFE	155	155	99	152
MINIVITRO 4/100 MGE	155	155	99	152
MINIVITRO 5/120 MGE	160	160	109	152
MINIVITRO 6/150 MGE	180	180	112	176